


TAHİL PAKETLEME MAKİNASI

Grain Packing Machine


IGM MACHINE

TEK- ÇİFT TERAZİLİ
Single-Double Weigher



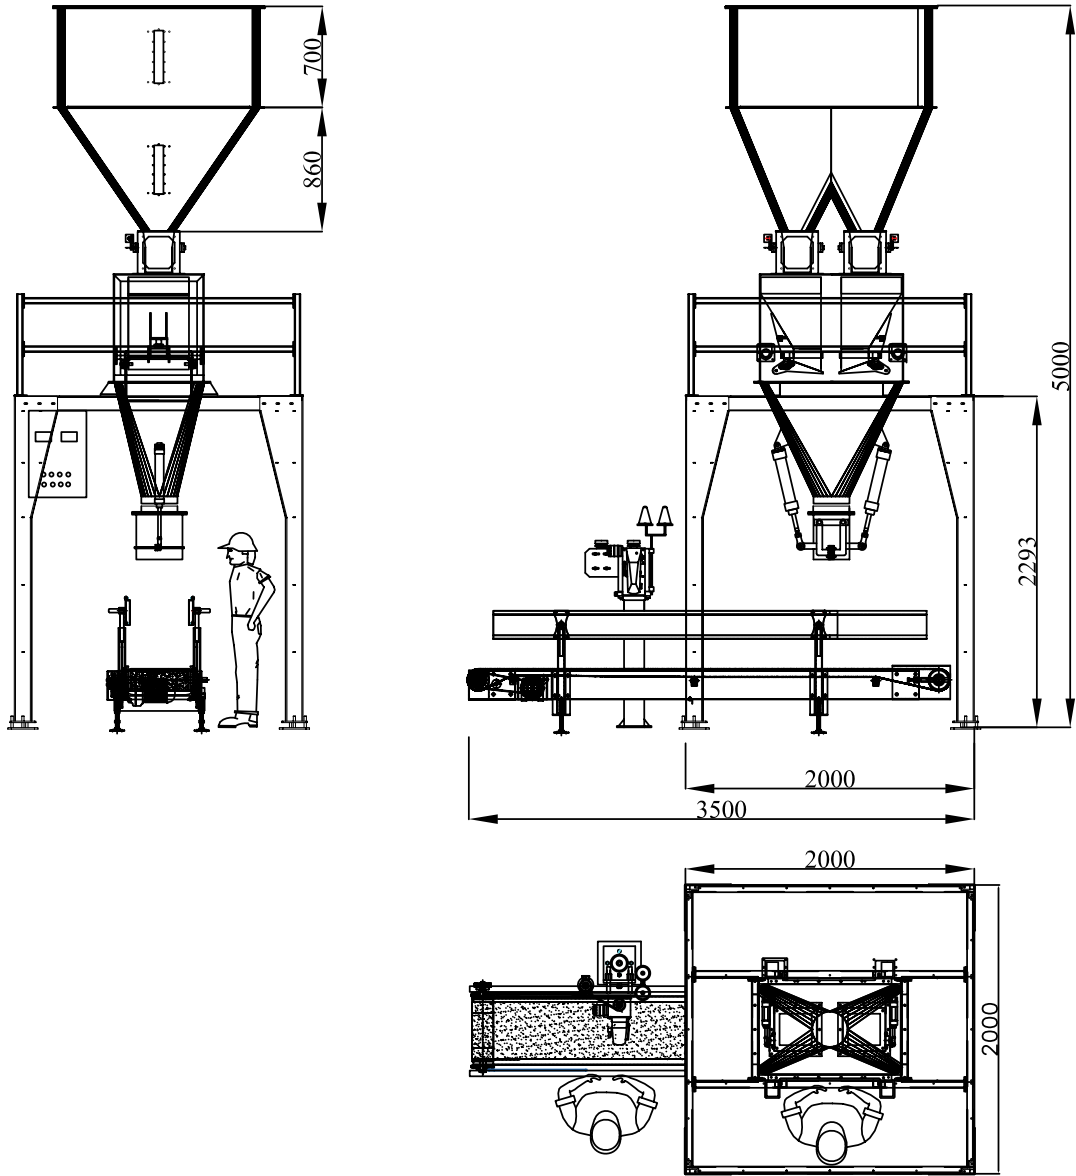

TARTIM KAPASİTESİ WEIGHING CAPACITY	ELEKTRİK TÜKETİMİ ELECTRICITY CONSUMPTION	ELEKTRİK ÇIKIŞI ELECTRICAL OUTPUT	HAVA BASINÇI AIR PRESSURE	BESLEME BUNKERİ HACMİ FEED VOLUME
TEK TARTIM : 5-6 tor/dk SINGLE WEIGHING:5-6 bag/min.	2 kw /h	400 V/50-60 hz	6-8 bar	0.6 (m ³)
ÇİFT TARTIM :1 2-14 tor/dk DOUBLE WEIGHING:12-14 bag/min.	3 kw/h			2 (m ³)

TR

- Çuval sıkıştırma vibratörü
- Beslenme helazonu,
- Taşıma platformu
- Dikiş bantı; hidrolik sistem yükseklik ayarı,
- Dikiş makinası ayağı; manuel yükseklik ayarı
- Elektronik sistem dolum kontrolü
- Kullanılan silindirler FESTO markalıdır.

ENG

- Bag holding vibrator
- Feeding screw
- Machine frame
- Sewing belt; hydrolically height-adjustable
- Sewing machine's leg is manually height-adjustable
- Electronical controller
- Cylinders are FESTO